



**Qmount**

UV MOUNTING IN 60 SECONDS

**THE FAST WAY TO  
TRANSPARENT MOUNTED SAMPLES**

## THE INNOVATIVE MOUNTING SOLUTION

# Qmount – UV MOUNTING DEVICE


The Qmount is a modern device for the light-curing-based mounting of materialographic samples.

The samples are placed in the device which is equipped with customized, powerful LED technology. The UV transparent mounting moulds are filled with the UV curing resin. The transparent sample can be removed within a very short time frame. A suction unit from the QATM portfolio can be connected to the device to increase work safety.



### Benefits Qmount

- I UV mounting in the shortest possible time (60 seconds)
- I Highly efficient, long-life LED technology
- I Robust machine design
- I Easy handling
- I Connectable suction unit (optional)

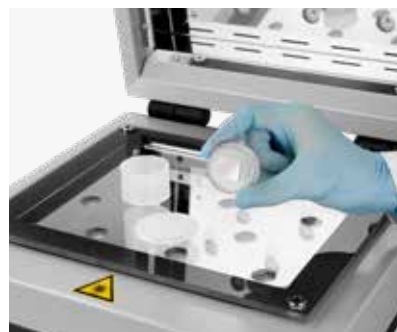

### MOUNTING IN A SHORT TIME

The compact laboratory device is equipped with specially developed and durable LED boards, which irradiate the samples highly efficiently with UV radiation of a very narrowly tolerated wavelength range (emission maximum at  $\lambda = 365 \text{ nm}$ ) and allow standard samples to cure within 60 seconds.



### ROBUST TECHNOLOGY

The integrated ventilation guarantees low polymerization temperatures of approx. 70 - 90 ° C. A robust design with a powder-coated aluminum housing and high-quality components enable high sample volumes. The hood is equipped with cushioned hinges to close it gently.



### HIGH SAMPLE CAPACITY

The device contains a scratch-resistant glass plate (200 x 260 mm) which enables the simultaneous curing of up to 12 samples with a diameter of 40 mm. The work area is easy to clean due to the simple design.




### EASIEST OPERATION

The process parameters are clearly shown on a color display and can be continuously adjusted using a rotary knob. The mounting process is started, paused or ended using the QATM start-stop button. An acoustic signal informs the user at the end of the process.



### WORK SAFETY AND COMFORT

As standard, the device is equipped with a connection for external suction to filter the vapors and odors and to increase work safety. A suitable suction device with activated carbon filter is available in the QATM accessories.

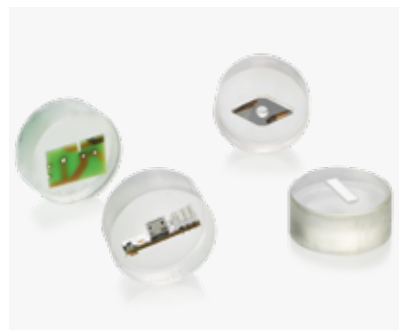


### MULTI-TASK VERSATILITY

Due to the very short process times, the Qmount opens up the possibility of producing transparent, materialographic standard mountings of various materials very quickly and cost-effectively.



### CONSUMABLES

For a perfect mounting process, QATM offers the appropriate UV curing resin, UV transparent mounting moulds in different diameters and mounting aids.

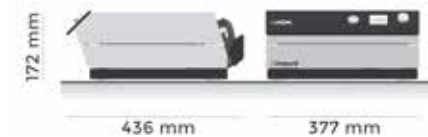

## TECHNICAL DATA

Max. sample support surface	200 x 260 mm
Max. sample height	40 mm
Wavelength	365 nm
Adjustable curing time	0 - 100 min
Polymerization temperature (depending on application)	70 - 90 °C
Connection voltage	100 - 240 V 50/60 Hz (1Ph/N/PE)
Dimensions (W x H x D)	377 x 172 x 436 mm
Weight	~ 14.5 kg (depending on equipment)

ATM Qness GmbH

Emil-Reinert-Str. 2  
57636 Mammelzen  
Germany

Phone: +49 2681 9539 0  
Fax: +49 2681 9539 27

ATM Qness GmbH

Reitbauernweg 26  
5440 Golling  
Austria

Phone: +43 6244 34393  
Fax: +43 6244 34393 30

PREMIUM QUALITY  
MADE IN GERMANY



info@qatm.com www.qatm.com

## VERDER scientific

VERDER SCIENTIFIC

SCIENCE  
FOR SOLIDS

Verder Scientific is a business field belonging to the Verder Group and sets standards in the development, manufacture and sale of laboratory and analytics devices. Used in quality control, research and development for test-piece preparation and the analysis of solids.

For several decades our companies have supplied production plants and research institutes, laboratories for quality testing and analytics, all kinds of technical specialists and scientists with modern, reliable devices to solve the many and varied challenges they face.

